

INTENDED USE

Mekano® CH100-2T2 is a triangular shaped, area efficient, extremely versatile channel with excellent torsional resistance. Ideally suited for support of heavy electro, instrumentation and HVAC applications. A version in 3 mm material thickness and square holes is also available for piping applications.


INSTRUCTION FOR USE

Mekano® CH100-2T channels can be fixed together using M10 self locking bolts. The large hole on the channel allows the bolts to be easily fitted.

Channels can be fitted back to back.



CH100-2T2 fitted back to back. The large holes on one side of the triangle channel make the channel easy to assemble. The bolts can be fitted from both sides.

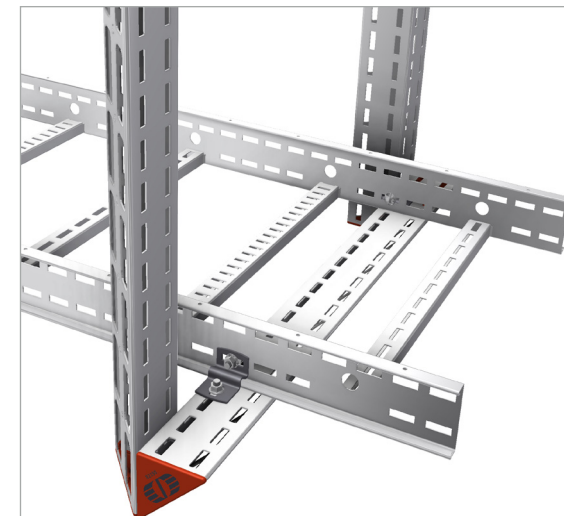


CH100-2T as U-support carrying a wide OE cable ladder. Plastic end protectors are available.


Typical multi discipline support with CH100-2T.



Typical U-support. Also suitable as Cantilever and L-support.

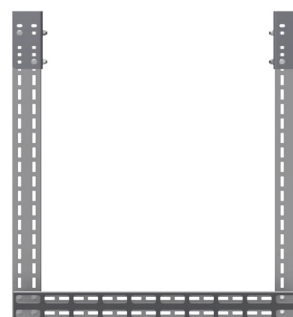

Typical goalpost support.

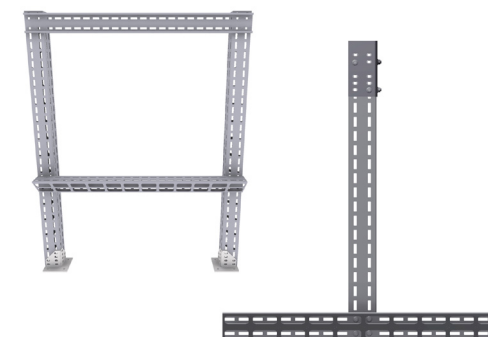

Typical T-support.



User Guide for Bolts:
Recommended Torque