





INTENDED USE

The hinge is used for elevation changes for OE ladders. The design allows for 4° increments.

INSTRUCTION FOR USE

- Attach the hinge loosely to the rails.
- Engage the notches in the ladder rail slots.
- Fit the centre hole in the hinge.
- Adjust the angle and add the second bolt in the available hole.
- Tighten the self locking screws securely.

The angle of the hinge can also be pre-set and locked using the bolts.

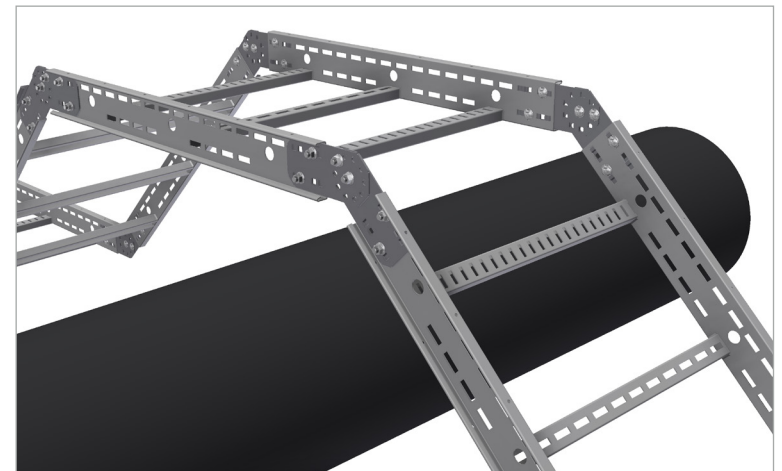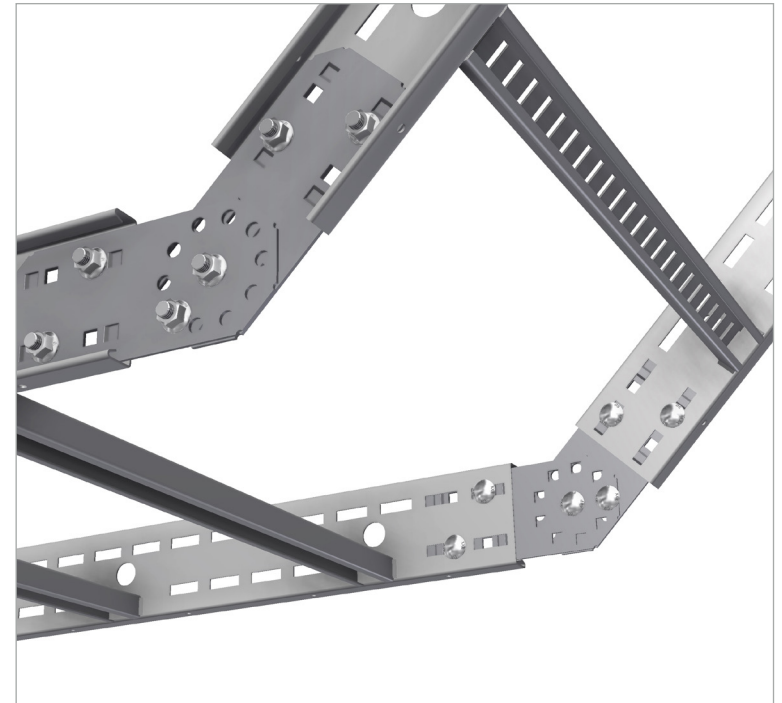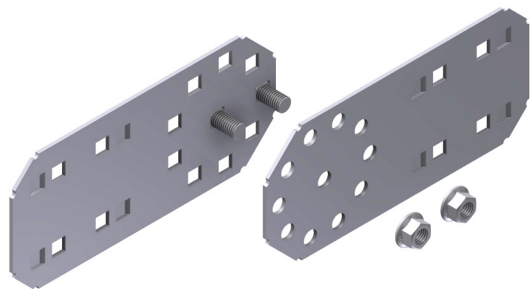

User Guide for Bolts:
Recommended Torque