



## INTENDED USE


Racks are normally supplied in kit form for optimal transport and storage, and can be simply and quickly assembled on site.

## INSTRUCTION FOR USE


1. Racks can be dry assembled on the floor and lifted into place, or built directly in place if the starter brackets are already positioned and work space is available. Order our optional Oglaend Jig for accurate and quick positioning of starter brackets.
2. Fit the rack rails/sides and loosely bolt the front rungs on the inside of the rack rails. Avoid conflict with the floor fixing brackets.
3. If using optional roof, fit it to the side rails.
4. Attach the back rungs equally spaced using the supplied washers and bolts and loosely tighten.
5. Attach bolted floor fixing brackets if used.
6. Check that the sides are vertical and tighten the floor fixing brackets securely.
7. Check that the rungs are level and tighten all bolts securely.

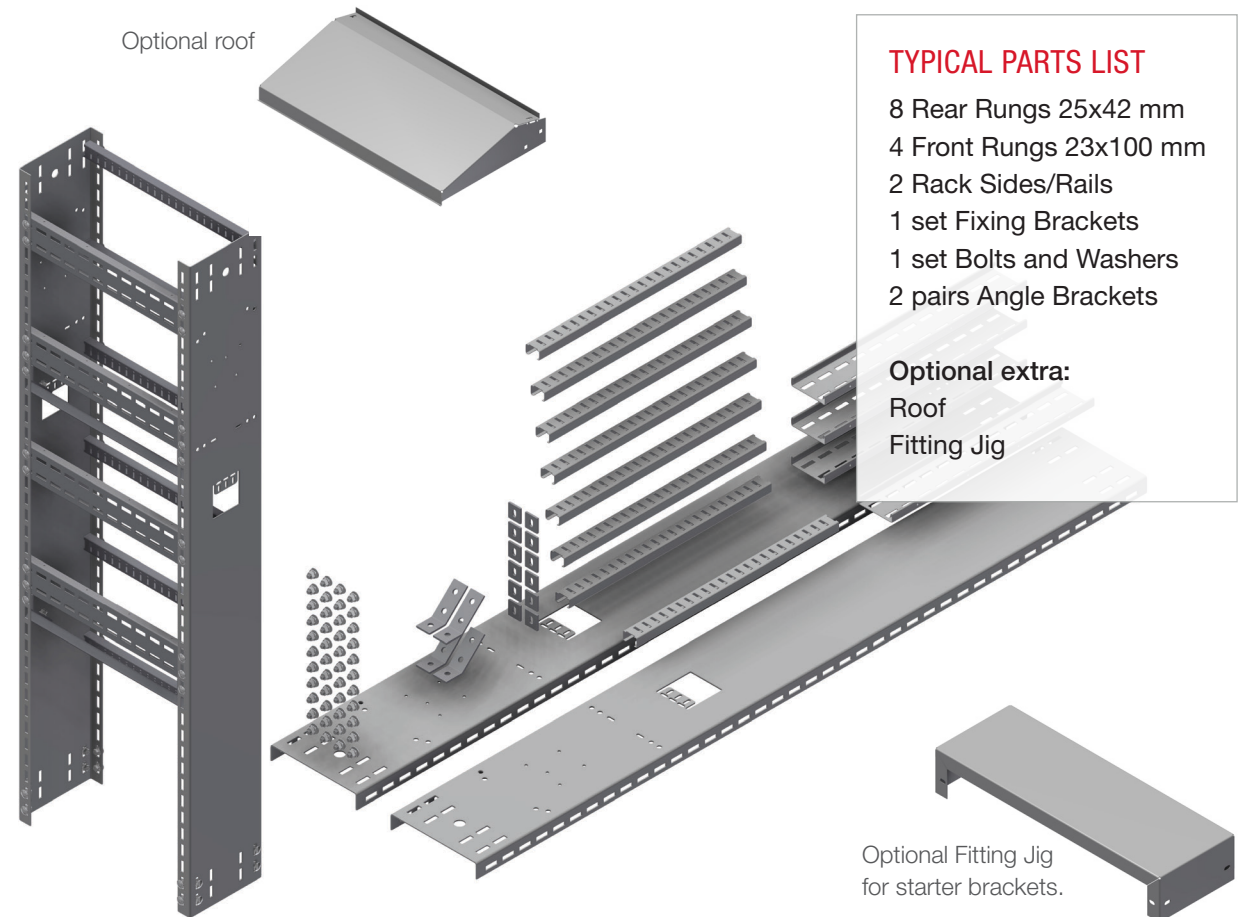

User Guide for Bolts:  
Recommended Torque



Bolt the front rungs on the inside of the rack sides/rails.



Bolt the back rungs on the inside of the rack sides using washers.

