

INTENDED USE



FOE Flat Elbows are single plane fixed radius bends.

INSTRUCTIONS FOR USE

Two splice plates are required on each side to attach to straight cable ladders or other fittings. Elbow parts may be introduced or removed to increase or decrease the angle of the bends. Simply disassemble elbows and add elbow piece as needed.

Angle increment angles must be maintained for each elbow i.e. 30° cuts are not compatible with 22.5° cuts.

Example: A 30° Flat Elbow may be modified with a 30° elbow part, to produce a 60° Flat Elbow.

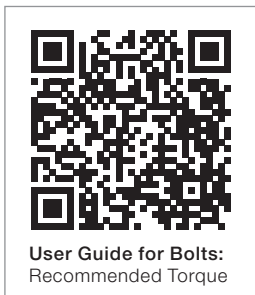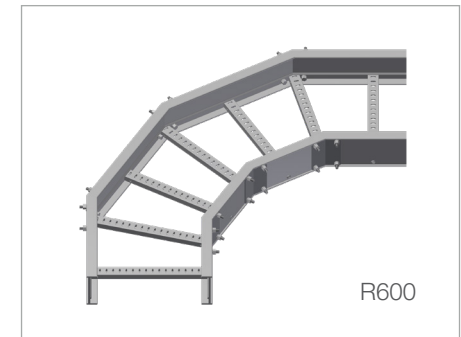

1. Choose a fitting to modify.



2. Choose a matching elbow part. **NOTE:** Angles and width must match original fitting.



3. Disassemble original fitting and introduce elbow part.



4. Secure fasteners. Process may also be reversed to reduce bend angle.