

## INTENDED USE

To give a pipe a low friction surface to rest on, and protecting surrounding steel from heat exchange from the pipe.


## INSTRUCTION FOR USE

Use 4x M10 bolts to fix the PTFE pad to your channel of choice. Use the accompanying shim plates if needed.


Shim plates: 2x 2mm & 1x 1mm

Temperature range: -46°C to +150°C


PTFE Pad with accompanying shim plates.

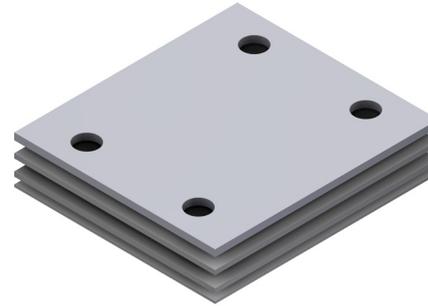

PTFE Pad installed on channel.

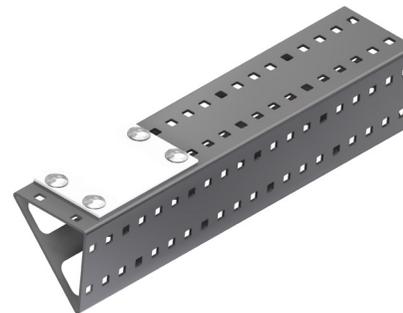

PTFE Pad installed on channel with pipe.

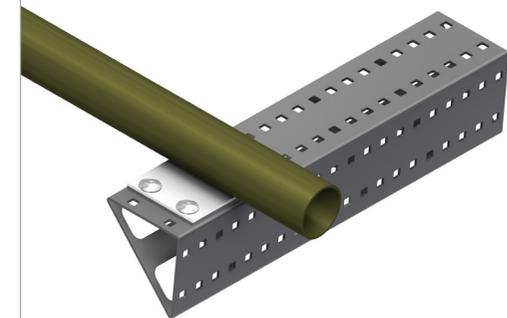

User Guide for Bolts:  
Recommended Torque