


## INTENDED USE

Beam clamps for providing vertical support directly from structural beams without drilling or other hot-works. The design allows for future adjustment and relocation.

The clamps are suitable with CH50-2T as a traverse beam, allowing for adjustment of the support positioning. Allow adjustment without damage to paintwork. Suitable for flange thickness up to 14 mm.

## INSTRUCTION FOR USE

Cut and position the Mekano® channel in place. Attach the beam clamps using self locking bolts. The head of the bolt should be against the bracket as shown. Use a washer or reinforcing plate to distribute load around the nut. Adjust and tighten securely.

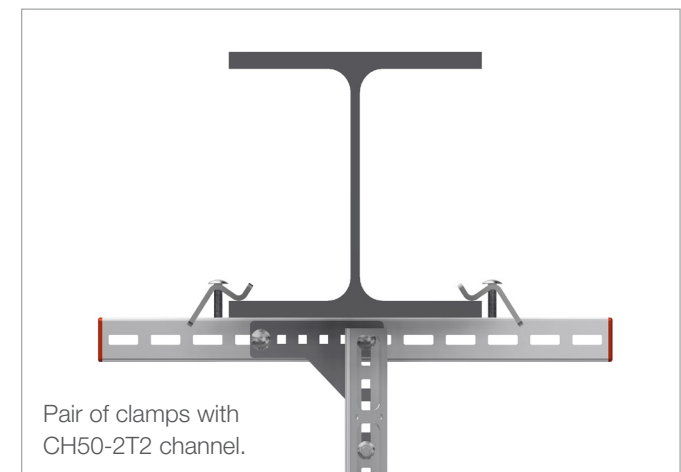

User Guide for Bolts:  
Recommended Torque