

INTENDED USE

OE brackets for creating Cross Pieces on two levels for assembly on site.

Brackets are chosen depending on the required spacing between the ladders.

INSTRUCTION FOR USE


Cross-junctions on two levels are easily formed by using one of the twist brackets available.

Attach the parts together loosely using self locking bolts. Adjust all parts, and tighten securely.

Flush fitting: No distance between ladders.
Supplied in pairs, one left, one right.




Elevated fitting for OE100

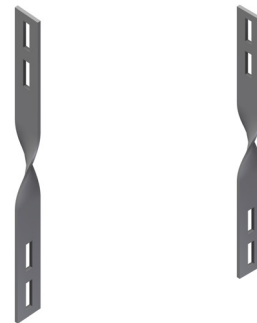

S-M SC-TW
40/390

S-M SC-TW
40/290

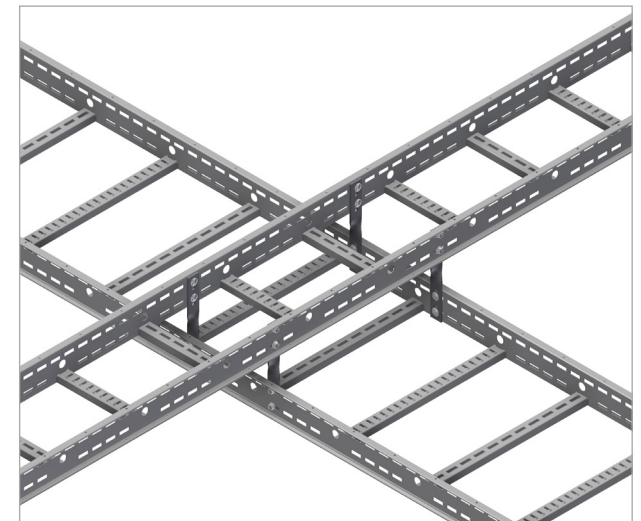

User Guide for Bolts:
Recommended Torque