

INTENDED USE


OE Reducer Part is used to cleanly change the ladder width in set increments, and can be used from both right and left hand sides. The reducer can also be combined with directional changes as shown.

INSTRUCTION FOR USE

The OE Reducer Part is used together with a Splice Connector (not included) to attach two ladders of different width.


When reducing both sides, the additional splice connector is not required.

Assemble loosely, adjust, and then tightened securely.

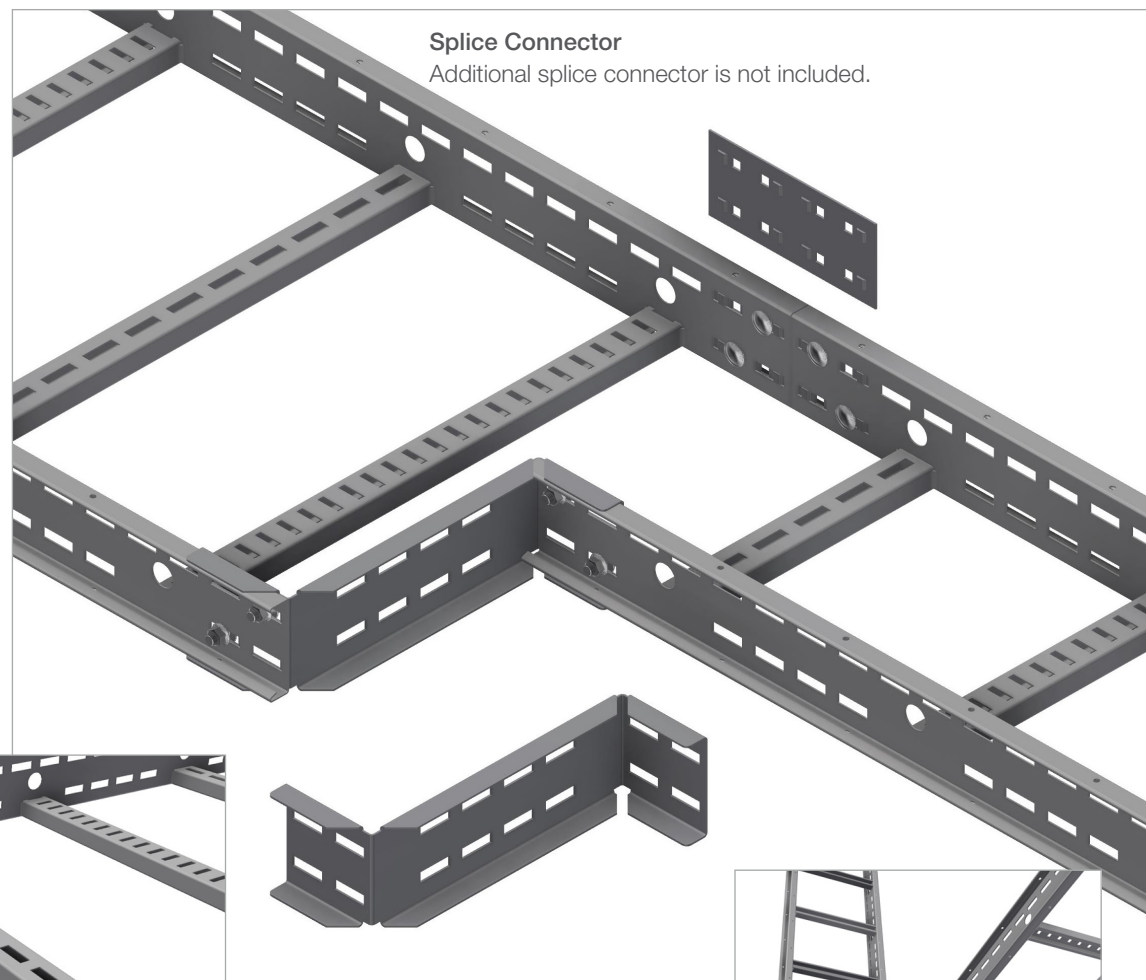

Both Sides

Both sides of the width can be reduced together.
(No additional splice required)

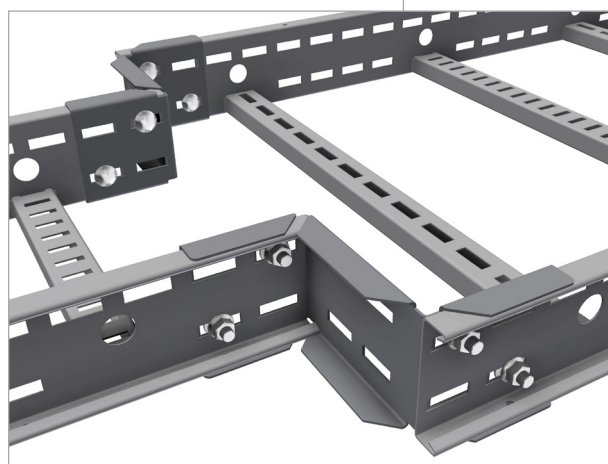

User Guide for Bolts:
Recommended Torque

Alternative
Vertical OE Cable Ladder branching
from a horizontal run.

